

此图仅供参考, 出货规格详见尺寸图面
The picture is just for the reference. Please check the actual dimensions on the drawing.

*标准连接模组不提供同动精度
Assembly accuracy is not guaranteed for the standard multi-axis system.

最大行程 Maximum Stroke

X轴 X-axis 800mm Y轴 Y-axis 300mm

最大速度 Maximum Speed

X轴 X-axis 500mm/s Y轴 Y-axis 500mm/s

AC伺服马达容量 AC Servo Motor Output

X轴 X-axis 100W Y轴 Y-axis 100W

基本式样 Specification

项目 Item	X轴 X-axis	Y轴 Y-axis
轴型式 Model Type	GTH5	GTH5
位置重复精度 Repeatability (mm)	±0.01	±0.01
螺杆菌程 Ball Screw Lead (mm)	10	10
最高速度 Maximum Speed (mm/s)	500	500
标准行程 Stroke Pitch (mm)	50-800mm	50-300mm
AC伺服马达容量 AC Servo Motor Output (W)	100	100
使用环境 Environment	0~40°C, 85%RH Below	

最大可搬运重量 Maximum Payload


Y轴行程 Y Stroke (mm)	100	150	200	250	300
Y轴负重 Y Payload (kg)	7	6.5	6	5.5	5

* 限定水平安装。
Only for horizontal installation.


* 标准连接模组, 不提供同动精度。
Assembly accuracy is not guaranteed for the standard multi-axis system.

型号表示方式 Ordering Method

XYGT220-A1 -BB- 400-300-M-C -0001

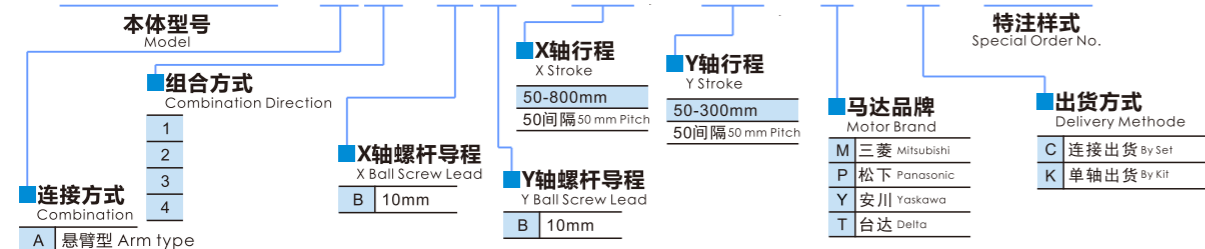

XYZH550-A尺寸图 Size

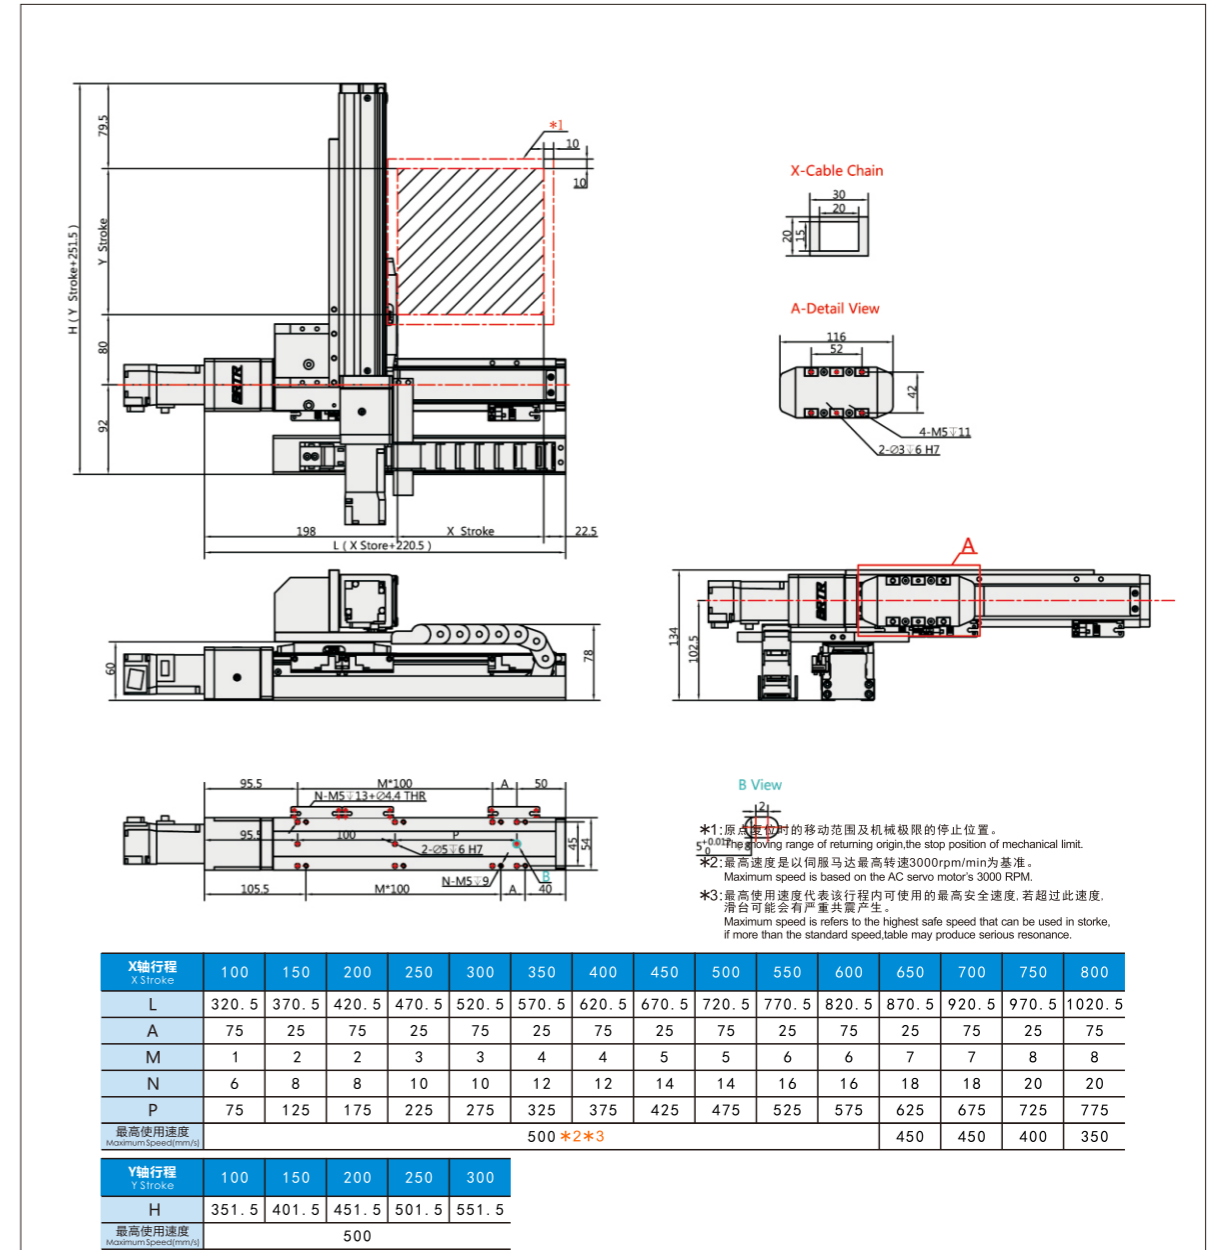

组合方式 Combination Mode

